

## Line Interactive UPS 1500VA/900W + Battery



**Kode** : Plus5L-U1500G(B)

**Kategori** : Discontinued

**Harga** : Rp 1.530.000,00

Plus5L-U1500G adalah produk dari APlus UPS System dengan rating 1500VA/900Watt dan memiliki desain "Easy Battery Replacement". Desain ini memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.

**\*Penjualan produk ini termasuk battery VRLA 12V/9AH**

**\*Pengiriman hanya jalur darat dan area pulau jawa**

**\*Garansi untuk battery adalah 6 bulan**

Penawaran Harga Spesial

 **08112039555**



## Features :


- Controlled by a technologically advanced microprocessor guaranteeing high reliability
- Equipped with 2-steps boost & 1-step buck AVR to stabilize output voltage
- USB port and monitor software is designed to manage UPS status via PC (Optional)
- Built-in DC start function enables UPS to be started without AC power supplied
- Constant current, constant voltage battery charger (CCCV Battery Charger)
- UPS will charge itself even though power switch is off (Off mode charging)
- UPS will shut down upon battery low ; UPS will restart automatically upon AC recovery (Auto-restart)
- Over / under voltage protection (UPS will go to battery mode)
- Easy replacement battery design
- Lightning / surge protection 175 joules

## Battery Type :

- VRLA 12V/9AH
- 2 pcs
- **Battery dimension 151 x 65 x 100 mm**

## Easy Battery Replacement and Installation :

**Intelligent Battery Door Design:**

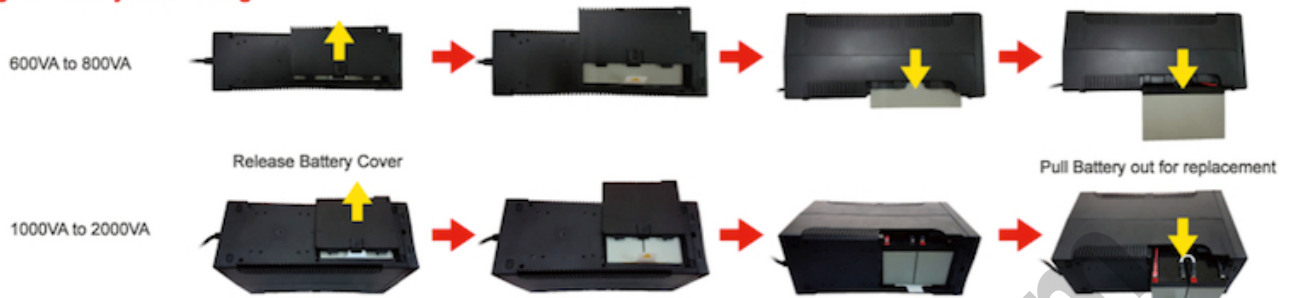

Manual :

[UPS-Aplus-Plus5L.pdf](#)

Specification :

|                    |   |
|--------------------|---|
| <b>INPUT</b>       |   |
| Voltage            | 220V/230Vac   |
| Voltage Range      | -30% +25%   |
| Frequency          | 50Hz or 60Hz (Auto-Sensing)   |
| <b>OUTPUT</b>      |   |
| Voltage Regulation | +/- 10%   |
| Frequency          | AC mode: 47-53Hz for 50Hz or 57-63Hz for 60Hz ; Battery mode:50Hz or 60Hz +/- 1Hz |
| Waveform           | Simulated Sinewave  |
| Transfer Time      | < 6ms(Typical)  |
| Outlet:            | Schuko 4pcs + IEC-320 C13 2pcs Backup/AVR/Surge protected                         |
| <b>BATTERY</b>     |   |
| Voltage            | 24VDC   |
| Type               | 12V/9AH*2pcs  |
| Recharge Time      | 5 hours to 90% after complete discharge   |
| Safety Protection  | Over Charge & Over Discharge Protection   |

|                            |   |
|----------------------------|---|
| Advance Battery Management | Yes   |
| <b>DISPLAY</b>             |   |
| LED Status Indicators      | Input voltage, Output voltage, Load level, Battery level, Fault, Battery fail, Overload, AC normal  |
| <b>AUDIBLE ALARM</b>       |   |
| Battery Mode               | Two short tones every 8 seconds   |
| Low Battery                | Four short tones every seconds  |
| Overload                   | Beeping continuously  |
| Fault                      | Beeping continuously  |
| <b>MANAGEMENT</b>          |   |
| USB Communication Port     | Plus5L-U series: Yes, and download software is included.<br>Monitoring software can support Microsoft Windows 2000/XP/Vista/7/8/10, Microsoft Windows Server 2003/2008/2012, Novell NetWare v3.1x/v4.x/v5.x, Linux, FreeBSD, MacOSX10.5.5 |
| <b>ENVIRONMENT</b>         |   |
| Operating Temperature      | 0° C - 40° C (32° F ~ 104° F)   |
| Humidity                   | 0-95% (Non-condensing)  |
| Acoustic Noise             | <40 db at 1M  |
| <b>PHYSICAL</b>            |   |
| Dimension (W*D*H)          | 343*135*208mm   |

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/994/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**