

# RG-RAP6202(G) REYEE Wi-Fi 5 AC1300 Outdoor Omni-directional Access Point



**Kode** : RG-RAP6202(G)

**Brand** : Ruijie - Reyee

**Jenis** : Wireless Outdoor

**Harga** : Rp 1.976.000,00

RG-RAP6202(G) Ruijie Reyee Wi-Fi 5 AC1300 Outdoor Omni-directional Access Point. Rock-solid in Harsh Environments with IP68 Protection. Adopts completely sealed, waterproof, dustproof, moisture proof and flame-retardant, wind erosion protection, Wide Temperature range, and 4kV surge protection design. Built-in 4 high gain antennas, supports full coverage with radius of 100 meters at 2.4GHz, and 300 meters at 5GHz\*.

**\*Belum termasuk adaptor dan poe injector**


**\*Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

- 'UFO' design, a perfect blend of wireless technology and artwork
- IP68 protection, rock-solid in harsh environments
- Omni-directional coverage with long range
- Easily add extra outdoor Wi-Fi with Reyee Mesh
- Rack-separated mounting design, easily installation on high

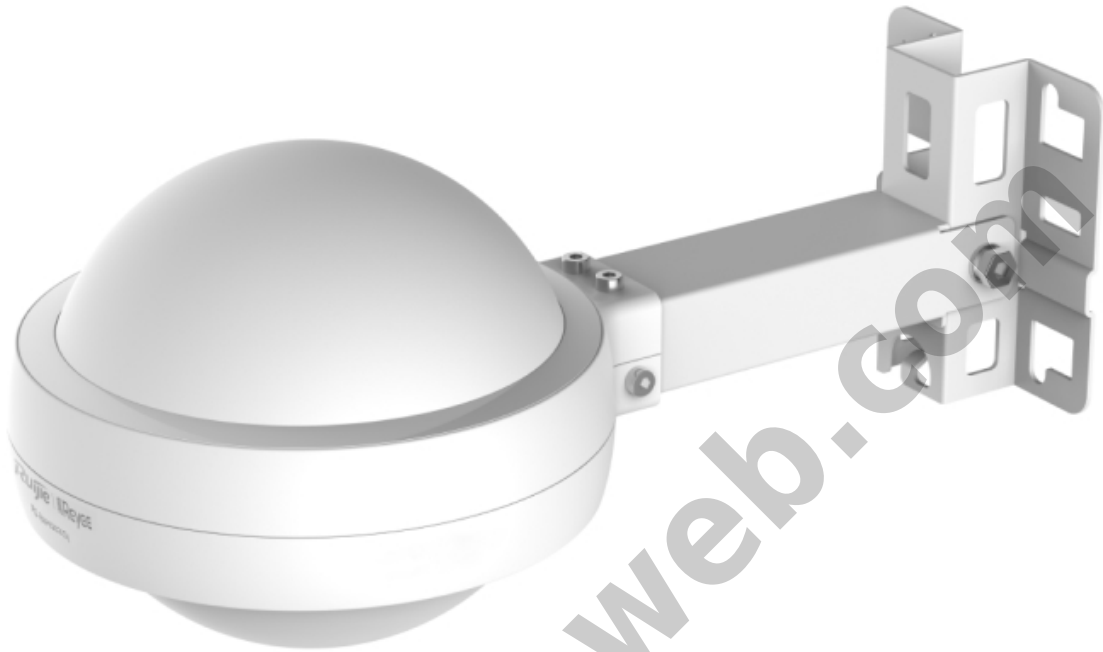

### Specification

|                              |  |
|------------------------------|--|
| <b>Model</b>                 | RG-RAP6202(G)  |
| <b>Protocol</b>              | Wi-Fi 5 (IEEE 802.11ac Wave2)<br>Wi-Fi 4 (IEEE 802.11n)  |
| <b>Antenna</b>               | Built-in Omnidirectional Antennas (2.4GHz: 3 dBi; 5GHz: 4 dBi)   |
| <b>Spatial Streams</b>       | 2.4 GHz: 2x2 MU-MIMO<br>5 GHz: 2x2 MU-MIMO   |
| <b>Max Throughput</b>        | Up to 400 Mbps at 2.4 GHz<br>Up to 867 Mbps at 5 GHz   |
| <b>Service Ports</b>         | 2x 10/100/1000 Base-T  |
| <b>Power Supply</b>          | 802.3af/802.3at PoE, local power supply, DC 12V/1.5A<br>(Note: The power adapter is sold as an optional accessory) |
| <b>Power Consumption</b>     | ≤ 12.95 W  |
| <b>Operating temperature</b> | -30°C-65°C   |
| <b>Storage temperature</b>   | -40°C-85°C   |
| <b>MTBF</b>                  | >250000H   |

|                                      |     |
|--------------------------------------|-----|
| <b>Maximum number of clients</b>     | 110 |
| <b>Recommended number of clients</b> | 96  |
| <b>Maximum Number of SSIDs</b>       | 8   |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1021/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**

[www.citraweb.com](http://www.citraweb.com)