

TSW100 TELTONIKA Industrial Unmanaged PoE+ Switch



Kode : TSW100
Brand : Teltonika
Jenis : Switch Unmanaged POE
Harga : Rp 1.385.000,00

TSW100 is an unmanaged Gigabit Ethernet switch supporting Power-over-Ethernet. Classified as power source equipment (PSE), it centralizes the power supply, providing up to 30 watts per port and reducing installation effort. Five Gigabit Ethernet ports provide an economical high-bandwidth solution for a secure industrial Ethernet network.


Produk ini belum termasuk power adaptor

Penawaran Harga Spesial

 08112039555

Features :

- 4 x PoE+ ports with 802.3af and 802.3at support
- Total power budget at PSE up to 120 W
- 5 x Gigabit Ethernet with speeds up to 1000 Mbps
- DIN rail and surface mounting options

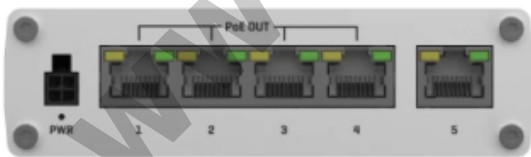

Specification

| | |
|-----------------|--------|
| Model | TSW100 |
| ETHERNET | |

| | |
|--|---|
| LAN | 5 x ETH ports, 10/100/1000 Mbps, supports auto MDI/MDIX crossover |
| IEEE 802.3 series standards | 802.3i, 802.3u, 802.3ab, 802.3x, 802.3az, 802.3ad |
| POE | |
| PoE ports | Port 1- 4 |
| PoE standards | 802.3af and 802.3at |
| PoE Max Power per Port (at PSE) | 30 W |
| PoE Power Budget (at PSE) | 120 W |
| PERFORMANCE SPECIFICATIONS | |
| Bandwidth (Non-blocking) | 10 Gbps |
| Packer buffer | 128 KB |
| MAC address table size | 2K entries |
| POWER | |
| Connector | 4-pin industrial DC power socket |
| Input voltage range | 7 - 57 VDC |
| Input voltage range for PoE | 44 - 57 VDC |
| Power consumption | Idle: 2 W / Max (no PoE): 9 W / PoE Max: 129 W |
| PHYSICAL INTERFACES | |
| Ethernet | 5 x RJ45 ports, 10/100/1000 Mbps |
| Status LEDs | 1 x Power LED, 10 x LAN status LEDs |
| Power | 1 x 4-pin power connector |
| Other | 1 x Grounding screw |
| PHYSICAL SPECIFICATION | |
| Casing material | Full aluminum housing |
| Dimensions (W x H x D) | 115 x 32 x 95 mm |
| Mounting options | DIN rail or wall mounting (additional kit needed), flat surface placement |

| OPERATING ENVIRONMENT | |
|---------------------------|---------------------------|
| Operating temperature | -40 °C to 75 °C |
| Operating humidity | 10% to 90% non-condensing |
| Ingress Protection Rating | IP30 |

Standard Package Contains :

- TSW100
- 62 W PSU
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1062/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com