CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

TSW212 TELTONIKA Industrial Managed Switch




Kode : TSW212
Brand : Teltonika
Jenis : Switch Managed
Harga : Rp 2.724.000,00

TSW212 is an L2 managed Ethernet switch with additional L3 features, like DHCPv6 client support and static IPv6 routing. This switch supports protocols, including EtherNet/IP, PROFINET, and MRP, and has 8 Gigabit Ethernet ports and 2 SFP ports to ensure robust long-range fibre optic communication.

Penawaran Harga Spesial
08112039555

Features :

- L2 with additional L3 features for advanced management capabilities
- Supports PROFINET for automated data processing alongside other protocols, like EtherNet/IP and MRP
- 8 x Gigabit Ethernet ports and 2 x SFP ports for fibre optic communication
- Teltonika Networks OS for switches, intuitively designed for infinite configurations

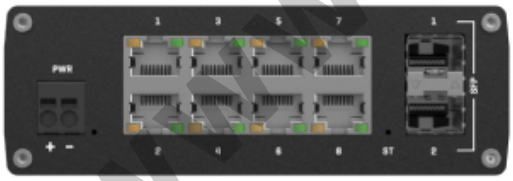



www.citraweb.com

Specification

Model	TSW212
ETHERNET	
LAN	Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

Fiber	2 x SFP ports
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3z
SERVICES	
EtherNet/IP	Yes
PROFINET (class B)	Yes
SNMP V2, V3	Yes
LLDP	Yes
Network Management	802.1p class of service, 802.1x port-based network access control, 802.1Q VLAN
PERFORMANCE SPECIFICATIONS	
Bandwidth (Non-blocking)	20 Gbps
Forwarding rate	14.88 Mpps
Packer buffer	512 KB
MAC address table size	8K entries
Jumbo frame support	10000 bytes
POWER	
Connector	2-pin industrial DC power socket
Input voltage range	7 – 57 VDC
Power consumption	Idle: < 2.5 W / Max: 6 W
PHYSICAL INTERFACES	
Ethernet	8 x RJ45 ports, 10/100/1000 Mbps
Fiber	2 x SFP ports
Status LEDs	1 x Power LED, 1 x Aux LED, 16 x ETH status LEDs, 2 x SFP status LEDs
Power	1 x 2-pin industrial DC power socket
Reset	Software reset button
Other	1 x Grounding screw

www.citraweb.com

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

PHYSICAL SPECIFICATION	
Casing material	Anodized aluminum housing and panels
Dimensions (W x H x D)	132 x 44.2 x 122.2 mm
Mounting options	Integrated DIN rail bracket, wall mount, flat surface (additional kit needed)
OPERATING ENVIRONMENT	
Operating temperature	-40 °C to 75 °C
Operating humidity	10% to 90% non-condensing
Ingress Protection Rating	IP30

Standard Package Contains :

- TSW212
- QSG (Quick Start Guide)
- Packaging box

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1224/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com