

# TSW202 TELTONIKA Managed PoE+ Switch



**Kode** : TSW202

**Brand** : Teltonika

**Jenis** : Switch Managed POE

**Harga** : Rp 2.434.000,00

TSW202 is a managed PoE+ Ethernet switch, designed to provide granular network management capabilities while centralising power distribution. This PoE+ switch enables flexibility over management and power supply and supports protocols, including EtherNet/IP, PROFINET, and MRP. The TSW202 has 2 SFP ports and 8 Gigabit Ethernet ports providing 30 W of power each.

**\*Belum termasuk power adaptor**

Penawaran Harga Spesial

08112039555


Compatible Power Adaptor :

- [Power Adaptor DC 2-PIN 48 Volt 60 Watt 1.25 A](#)

- [Power Adaptor DC 2-PIN 48 Volt 120 Watt 2.5A](#)

Features :

- L2 with additional L3 features for enhanced management and control
- 8 x port PoE+ switch with 2 x SFP ports for fibre optic communication
- Supports PROFINET for automated data processing alongside other protocols, like EtherNet/IP and MRP
- Teltonika Networks OS for switches, intuitively designed for infinite configurations

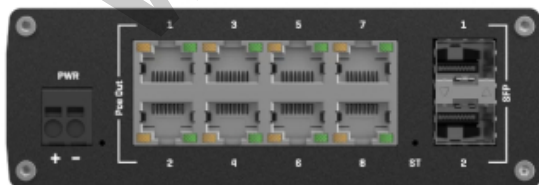

## Specification

<b>Model</b>	TSW202
<b>ETHERNET</b>	
<b>LAN</b>	Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover
<b>Fiber</b>	2 x SFP ports
<b>IEEE 802.3 series standards</b>	802.3i, 802.3u, 802.3ab, 802.3x, 802.3z
<b>POE</b>	
<b>PoE ports</b>	Port 1-8
<b>PoE standards</b>	802.3af and 802.3at Alternative B
<b>PoE Max Power per Port (at PSE)</b>	30 W
<b>PoE Power Budget (at PSE)</b>	240 W
<b>Maximum Ethernet cable length</b>	100 m
<b>PERFORMANCE SPECIFICATIONS</b>	
<b>Bandwidth (Non-blocking)</b>	20 Gbps
<b>Forwarding rate</b>	14.88 Mpps
<b>Packer buffer</b>	512 KB
<b>MAC address table size</b>	8K entries
<b>Jumbo frame support</b>	10000 bytes
<b>POWER</b>	
<b>Connector</b>	2-pin industrial DC power socket
<b>Input voltage range</b>	7 - 57 VDC
<b>Input voltage range for PoE</b>	44 - 57 VDC
<b>Power consumption</b>	Idle: < 3 W / Max: 8 W / PoE Max: 248 W
<b>PHYSICAL INTERFACES</b>	
<b>Ethernet</b>	8 x RJ45 ports, 10/100/1000 Mbps
<b>Fiber</b>	2 x SFP ports

<b>Status LEDs</b>	1 x Power LED, 1 x Aux LED, 16 x ETH status LEDs, 2 x SFP status LEDs
<b>Power</b>	1 x 2-pin industrial DC power socket
<b>Reset</b>	Software reset button
<b>Other</b>	1 x Grounding screw
<b>PHYSICAL SPECIFICATION</b>	
<b>Casing material</b>	Anodized aluminum housing and panels
<b>Dimensions (W x H x D)</b>	132 x 44.2 x 122.2 mm
<b>Mounting options</b>	Integrated DIN rail bracket, wall mount, flat surface (additional kit needed)
<b>OPERATING ENVIRONMENT</b>	
<b>Operating temperature</b>	-40 °C to 75 °C
<b>Operating humidity</b>	10% to 90% non-condensing
<b>Ingress Protection Rating</b>	IP30

Standard Package Contains :

- TSW202
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1225/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**