

# Standard 24 PoE UNIFI UBIQUITI 24-Port (16 POE+) Switch with 2-Port SFP Uplink

**Kode** : USW-24-POE

**Brand** : Ubiquiti

**Jenis** : Switch Managed POE

**Harga** : Rp 6.810.000,00




USW-24-POE UniFi 24 port GbE Layer 2 switch with 16-port GbE PoE+, 8 port GbE and 2 port SFP 1G.

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

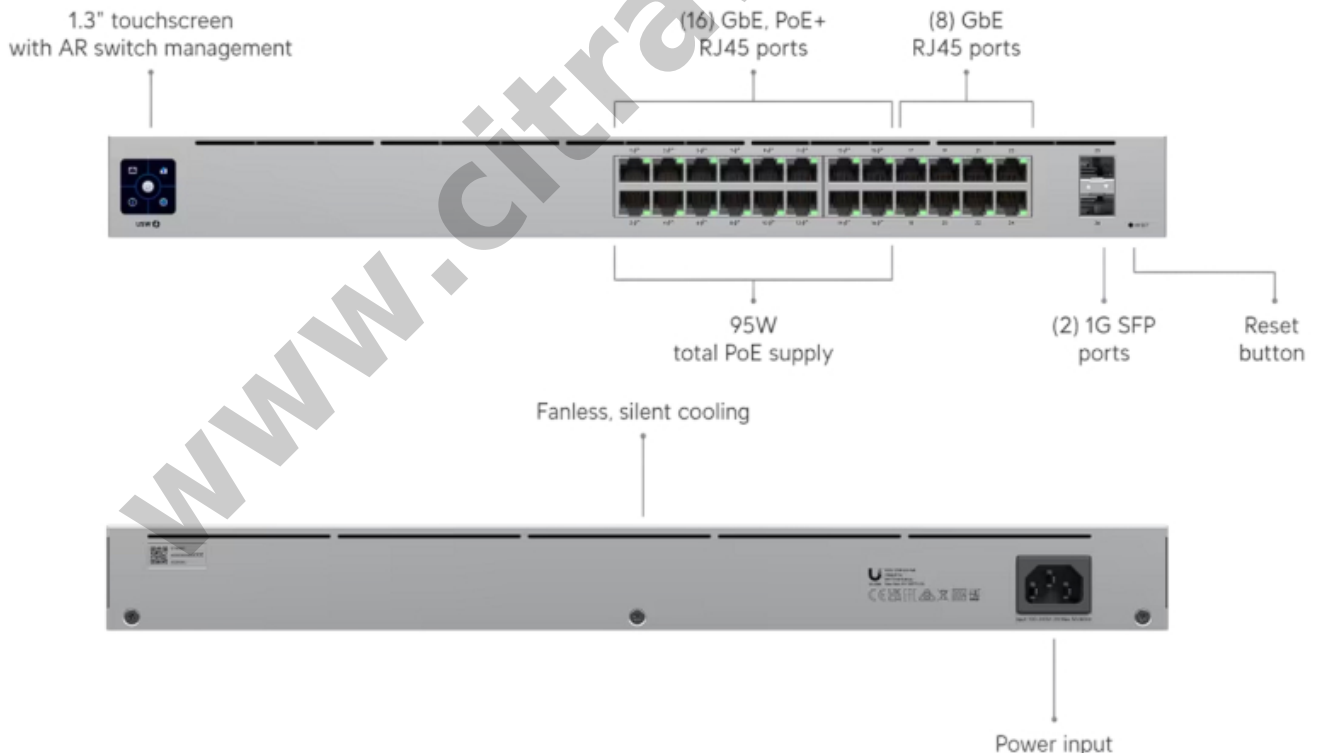

## Specification

<b>Model</b>	USW-24-POE
--------------	------------

<b>Ports</b>	1 GbE RJ45 : 24 (16 PoE+) 1G SFP : 2
<b>Total PoE Availability</b>	95W
<b>Max. PoE Wattage per Port by PSE</b>	PoE : 15.4W PoE+ : 32W
<b>Layer Type</b>	Layer 2
<b>Switching capacity</b>	52 Gbps
<b>Total Non-Blocking Throughput</b>	26 Gbps
<b>Forwarding rate</b>	39 Mpps
<b>Supported VLANs</b>	1000
<b>MAC address table</b>	8000
<b>Packet Buffer Size</b>	0.5 MB
<b>Dimensions (W x D x H)</b>	442 x 200 x 44 mm
<b>Max. Power Consumption</b>	25W (Excluding PoE Output) 120W (Including PoE Output)
<b>Power Method</b>	Universal input, 100—240V AC, 50/60 Hz
<b>Power Input Method</b>	AC input
<b>Power Supply</b>	AC/DC, internal, 60W
<b>Supported Voltage Range</b>	100—240V AC
<b>Management</b>	Ethernet AR
<b>Heat Dissipation (Excluding PoE Output)</b>	85.3 BTU/hr
<b>Enclosure Material</b>	SGCC steel
<b>LCM Display</b>	1.3" touchscreen
<b>Ambient Operating Temperature</b>	-5 to 40 C (23 to 104 F)
<b>ESD/EMP Protection</b>	Air: ± 16kV, contact: ± 12kV
<b>Ambient Operating Humidity</b>	10 to 90% noncondensing
<b>Certifications</b>	CE, FCC, IC

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1338/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**