

RG-RAP62-Wall RUIJIE REYEE Wi-Fi 6 AX3000 Dual-Band Multi-Port Wall-Plate AP



Kode : RG-RAP62-Wall

Brand : Ruijie - Reyee

Jenis : Wireless Indoor

Ruijie Reyee RG-RAP62-Wall Wi-Fi 6 AX3000 Dual band 2x2 MU-MIMO (2.4GHz&5GHz) wall-mount Access Point dilengkapi dengan 1x 10/100/1000Mbps WAN Port (PoE-In), 4x10/100/1000Mbps LAN Ports (1 PoE-Out) 803af PoE. Support Beamforming, Layer2/3/4 roaming, WPA2, Router mode, Captive portal, Master AP in Self-organizing Network dan Cloud/Eweb/APP management.

***Belum termasuk adaptor dan poe injector**

***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 **08112039555**

- Kecepatan Wi-Fi 6 AX3000 maksimal 2401Mbps pada 5 GHz dan maksimal 573 Mbps pada 2.4 GHz
- 4 x 1GE LAN Port (LAN4 mendukung PoE Out)
- Ultra-thin design dengan ketebalan 23.5 mm (0.93 in)
- Kompatibel untuk 86-mm, EU, dan US Standard Junction Boxes
- Manajemen terpusat pada Ruijie Cloud




Wi-Fi 6 AX3000 Speeds
Maximum 2401 Mbps in 5 GHz + Maximum 573 Mbps in 2.4 GHz

Multi-Port Wall-Plate AP
4 x 1GE LAN ports, with LAN4 supporting PoE Out

23.5 mm (0.93 in.) Ultra-Thin Design
Fit anywhere, beautify every space

Fast and Easy Installation
Support 86 mm, EU, and US standard junction boxes

Centralized Cloud Management
Manage the whole network on Ruijie Cloud

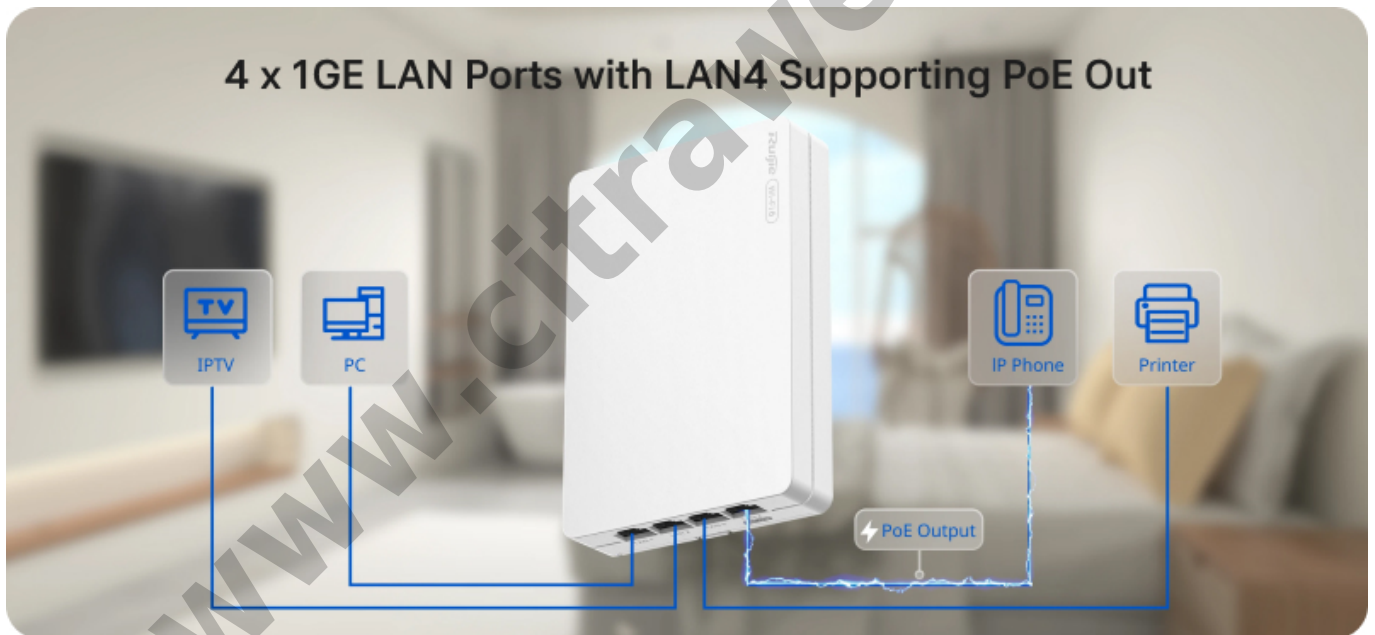



Specification

Model	RG-RAP62-Wall
Wi-Fi Standards	2.4GHz Wi-Fi 4 (IEEE 802.11b/g/n) Wi-Fi 6 (IEEE 802.11ax) 5GHz Wi-Fi 4 (IEEE 802.11a/n) Wi-Fi 5 (IEEE 802.11ac) Wi-Fi 6 (IEEE 802.11ax)
Max. Transmit Power	2400–2483.5 MHz, EIRP ≤27 dBm 5150–5350 MHz, EIRP ≤23 dBm 5725–5825 MHz, EIRP ≤23 dBm
Max Data Rate	2.4 GHz: 573 Mbps 5 GHz: 2401 Mbps
Spatial Streams	2.4 GHz: 2 x 2, MU-MIMO 5 GHz: 2 x 2, MU-MIMO
Antennas	Integrated 2.4 GHz and 5 GHz: 2 built-in omnidirectional antennas
Number of 10/100/1000BASE-T ports	5
Power Supply	PoE/PoE+
PoE In standard	IEEE 802.3af (PoE) Note: The standard does not support PoE Out. IEEE 802.3at (PoE+)

Number of PoE Out ports	1
PoE budget	10 W (when power source is IEEE 802.3at-compliant)
Max. Power Consumption	12 W (excluding PoE output)
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	5% RH to 95% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Surge protection	Ethernet port: ± 2 kV for common mode
Mounting options	Junction box
MTBF	400.000 hours
Maximum number of clients	64 (2.4 GHz) 256 (5 GHz) 256 (2.4 GHz and 5 GHz enabled)
Recommended number of clients	Support for IEEE 802.11ax and 160 MHz: 16 (2.4 GHz) 94 (5 GHz) 110 (2.4 GHz and 5 GHz enabled) Support for IEEE 802.11ax and 80 MHz: 16 (2.4 GHz) 64 (5 GHz) 80 (2.4 GHz and 5 GHz enabled) Support for IEEE 802.11ac: 8 (2.4 GHz) 32 (5 GHz) 40 (2.4 GHz and 5 GHz enabled)
Maximum Number of SSIDs	8
AP Mesh	Yes
Product dimensions (W x D x H)	86 mm x 23.5 mm x 125 mm (3.39 in. x 0.93 in. x 4.92 in) (excluding the mounting bracket)

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1514/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com