CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

eKitEngine AR180 Plus HUAWEI Dual Band Wi-Fi 7 Router Wireless



Kode : AR180 Plus
Brand : Huawei
Jenis : Router Wireless
Harga : Rp 1.465.000,00

HUAWEI eKitEngine AR180 Plus Dual Band Wi-Fi 7 Router Wireless adalah Enterprise-Grade Wireless Router Dual Band Wi-Fi 7 dengan 1 port 2.5G WAN dan 4 port gigabit LAN (3 port LAN/WAN). Perangkat ini support Mesh up to 8 perangkat, 12 IPSec Tunnels dan metal casing.


***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**
Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial
08112039555

- **Enterprise-Grade Wireless Router**
- **Wi-Fi 7**
- **Number of IPSec Tunnels: 12**
- **Metal Top Surface, Black**
- **Number of Managed APs: 8**
- **Number of Managed Devices: 9**
- **Number of connected terminals: 100**
- **Egress Bandwidth: 2Gbps**
- **VPN Forwarding Performance: 200Mbps**
- **4 GE Electrical Ports + 1 2.5GE Electrical Port**

www.citraweb.com



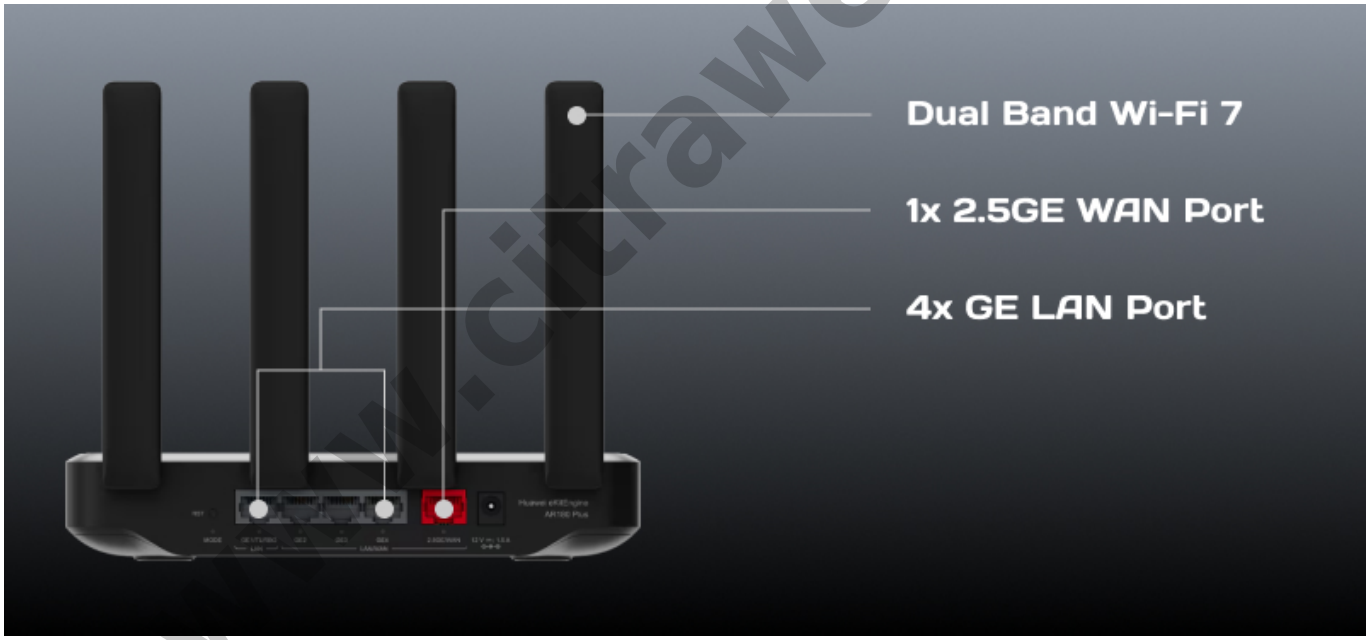

Spesifikasi

Model	AR180 Plus
Installation type	Work bench, Against the wall
Dimensions without packaging (H x W x D) [mm(in.)]	- Basic dimensions: 35 mm x 195 mm x 130 mm (1.38 in. x 7.68 in. x 5.12 in.) - Maximum dimensions: 163 mm x 195 mm x 150 mm (6.42 in. x 7.68 in. x 5.91 in.)
Typical power consumption [W]	7

Maximum power consumption [W]	13
Power supply mode	AC power adapter
Rated input voltage [V]	110 V AC–220 V AC; 50/60 Hz
Input voltage range [V]	90 V AC–264 V AC; 45 Hz–65 Hz
Maximum output power [W]	24 W
Safety regulation certification	IEC/EN/UL 62368-1 GB 4943.1 CSA C22.2 No. 62368-1 AS/NZS 62368-1
EMC certification	EN 55032 EN 55035 EN 300386 EN 61000-3-2 EN 61000-3-3 EN 301 489-1 EN 301 489-17 ICES-003 AS/NZS CIPSR32 VCCI-CIPSR32 GB/T 9254.1 FCC CFR47 part 15
Long-term operating temperature [°C(°F)]	0°C to 40°C (32°F to 104°F) Note: When the altitude is 1800 m-5000 m (5906 ft.-16404.2 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Long-term operating relative humidity [RH]	5% RH to 95% RH, non-condensing
Long-term operating altitude [m(ft.)]	< 5000 m (16404.2 ft.)
LAN ports	4 x GE electrical interfaces
WAN ports	1 x 2.5GE electrical port
Environmental standards compliance	EN 300 019-2 IEC 60068-2
Overtemperature alarm	Supported
Certification	EMC certification Safety certification Manufacturing certification

www.citraweb.com

Download Datasheet

* *Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1550/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com