

# RG-ES207GS-P REYEE 7-Port Gigabit Smart Cloud Managed PoE Switch, 1 x SFP Uplink

**Kode** : RG-ES207GS-P

**Brand** : Ruijie - Reyee

**Jenis** : Switch Managed POE

**Harga** : Rp 793.000,00



**RG-ES207GS-P** REYEE 7-Port Gigabit Smart Cloud Managed PoE Switch, 1 x SFP Uplink Layer 2 dilengkapi dengan 4 port PoE+ 10/100/1000BASE-T, 2 port 10/100/1000BASE-T dan 1 port SFP 1G.


**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

- 1 Port 1GE SFP untuk Uplink Fleksibel
- Switch Hemat Biaya
- Pengenalan IPC untuk Nilai Jaringan CCTV yang Ditingkatkan
- Perlindungan Pintar untuk Kelancaran Layanan
- PoE Perpetual
- Manajemen Masa Pakai di Ruijie Cloud Kapan Saja, Di Mana Saja

## FRONT VIEW

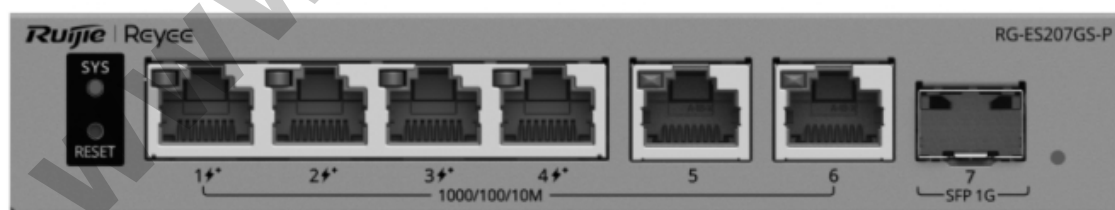

## BACK VIEW



**RG-ES207GS-P**

## Switch PoE yang Dikelola Cloud Pintar 7 Port Gigabit



4 x 10/100/1000BASE-T PoE+ Ports    2 x 10/100/1000BASE-T Ports    1 x 1GE SFP Port

-  **Alokasi PoE 54 W**
-  **Desain Tanpa Kipas**
-  **Opsi Uplink Fleksibel**
-  **Garansi 3 Tahun**

## PoE Permanen

Port PoE menyediakan daya tanpa gangguan bahkan selama proses memulai ulang switch.



Restart      Uninterrupted Power

### Specification

|                                          |                  |
|------------------------------------------|------------------|
| <b>Model</b>                             | RG-ES207GS-P     |
| <b>Number of 10/100/1000BASE-T ports</b> | 6                |
| <b>Number of 1GE SFP ports</b>           | 1                |
| <b>Number of PoE/PoE+ Out ports</b>      | 4                |
| <b>PoE power pins</b>                    | 1-2 (+), 3-6 (-) |

|                        |                                                                                                                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PoE budget             | 54 W                                                                                                                                                                                                                                                  |
| Layer Type             | Layer 2                                                                                                                                                                                                                                               |
| Switching capacity     | 14 Gbps                                                                                                                                                                                                                                               |
| Forwarding rate        | 10.42 Mpps                                                                                                                                                                                                                                            |
| MAC address table      | 2000                                                                                                                                                                                                                                                  |
| VLAN                   | 32                                                                                                                                                                                                                                                    |
| Fan                    | Fanless                                                                                                                                                                                                                                               |
| Dimensions (W x D x H) | 155 mm x 78 mm x 28 mm                                                                                                                                                                                                                                |
| MTBF                   | 200.000 hours                                                                                                                                                                                                                                         |
| Port surge             | 6 kV                                                                                                                                                                                                                                                  |
| Power Consumption      | 4 W (with no PoE load)<br>58 W (with full PoE load)                                                                                                                                                                                                   |
| Power input            | DC adapter:<br>Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz<br>Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz<br>Rated input current: 1.5 A<br><br>Output:<br>Rated output voltage: 54 V DC<br>Maximum output current: 1.2 A |
| Power supply           | DC power adapter                                                                                                                                                                                                                                      |
| Operating Temperature  | 0°C to 40°C                                                                                                                                                                                                                                           |
| Operating humidity     | 10% to 90% RH                                                                                                                                                                                                                                         |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1564/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)