CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

TP-LINK EAP720 OMADA BE5000 Ceiling Mount Wi-Fi 7 Access Point



Kode : EAP720
Brand : TP-Link Omada
Jenis : Wireless Indoor
Harga : Rp 1.994.000,00

TP-LINK EAP720 OMADA merupakan perangkat access point **Dual-Band 4-Stream Wi-Fi 7** up to 5.0 Gbps (4324 Mbps di 5GHz + 688 Mbps di 2.4GHz) dilengkapi dengan 1 port 2.5G PoE+ 802.3at cocok digunakan pada ceiling/wall.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

***Produk ini belum termasuk PoE Adapter.**
***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Penawaran Harga Spesial
08112039555

- **Dual-Band 4-Stream Wi-Fi 7:** up to 5.0 Gbps (4324 Mbps di 5GHz + 688 Mbps di 2.4GHz).
- **1× Port 2.5G:** Maksimalkan potensi penuh dari Wi-Fi 7.
- **Low Latency dan Interferensi :** Multi-Link Operation, Multi-Rus, dan 4K -QAM.
- **Fitur Lanjutan:** Mendukung manajemen terpusat, Mesh, dan Roaming Mulus (*Seamless Roaming*).

www.citraweb.com

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

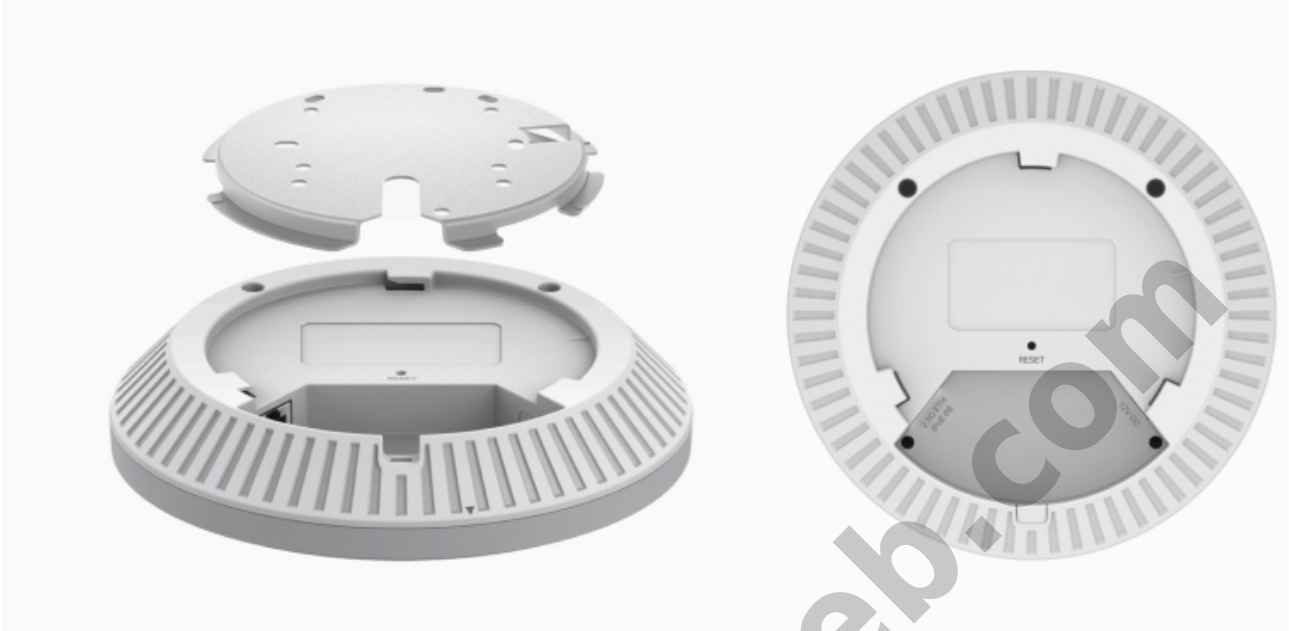

Spesifikasi

Model	EAP720
HARDWARE FEATURES	
Interface	1× 2.5G Ethernet Port
Button	Reset
Power Supply	802.3at PoE or 12V/1.5A DC (Power Adapter Included)
Max. Power Consumption	• 17.83 W (For PoE) • 13.99 W (For DC)
Dimensions (W x D x H)	6.3 × 6.3 × 1.4 in (160 × 160 × 36.7 mm)
Antenna	• 2.4 GHz: 2× 4.0 dBi • 5 GHz: 2× 5.0 dBi
Bluetooth	1 × 4.0 dBi, Bluetooth 5.2 *Firmware update may be required.
Mounting	Ceiling / Wall /Junction Box Mounting (Kits Included)
WIRELESS FEATURES	
Coverage	1500 ft² (140m²)
Concurrent Clients	250+
Wireless Standards	IEEE 802.11 a/b/g/n/ac/ax/be
Frequency	5 GHz, and 2.4 GHz
Signal Rate	688 Mbps (2.4 GHz) + 4324 Mbps (5 GHz)

www.citraweb.com

Transmission Power	< 25dBm (2.4GHz) < 25 dBm (5 GHz, UNII-1&UNII-4) < 24 dBm (5 GHz, UNII-2&UNII-3)
Certification	CE, FCC, RoHS, IC
Package Content	• Omada Ceiling Mount Access Point EAP720 • Installation Guide • Ceiling/Wall/Junction Box Mounting Kits
Environment	• Operating Temperature: 0 °C–40 °C (32 °F–104 °F) • Storage Temperature: -40 °C–70 °C (-40 °F–158 °F) • Operating Humidity: 10%–90% non-condensing • Storage Humidity: 5%–90% non-condensing

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1582/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com