

TP-LINK EAP620 HD OMADA AX1800 Ceiling Mount WiFi 6 Access Point


**Kode** : EAP620 HD**Brand** : TP-Link Omada**Jenis** : Wireless Indoor**Harga** : Rp 2.297.000,00

TP-LINK EAP620 HD OMADA merupakan perangkat access point **4-Stream Dual-Band Wi-Fi 6** dengan kecepatan up to 574 Mbps di 2.4GHz dan 1201 Mbps di 5GHz. Dilengkapi dengan 1 port Gigabit Ethernet 802.3at PoE cocok digunakan pada ceiling/wall.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial **08112039555**

- **Wi-Fi 6 Dual-Band 4-Stream:** 1201 Mbps pada pita 5 GHz dan 574 Mbps pada pita 2.4 GHz.
- **Konektivitas Kepadatan Tinggi (High-Density):** Mendukung hingga 1000+ koneksi simultan di lingkungan jaringan yang padat.
- **1x Port Gigabit:** Memastikan konektivitas yang cepat di seluruh jaringan.
- **Latensi dan Interferensi Rendah:** Teknologi MU-MIMO, OFDMA, dan 1024-QAM memastikan performa tinggi untuk jaringan Anda.
- **Penyebaran Fleksibel dan Pengaturan Mudah:** Mendukung catu daya 802.3at PoE dan DC untuk kemudahan pemasangan. Dilengkapi Omada SDN untuk pengaturan sekali klik.
- **Fitur Lanjutan:** Mendukung manajemen cloud tersentralisasi, mesh, dan *seamless roaming* (roaming tanpa jeda).
- **Cangkupan Lebih Luas:** Menjangkau hingga 1500 ft² (140 m²) untuk konektivitas nirkabel yang andal dan luas.

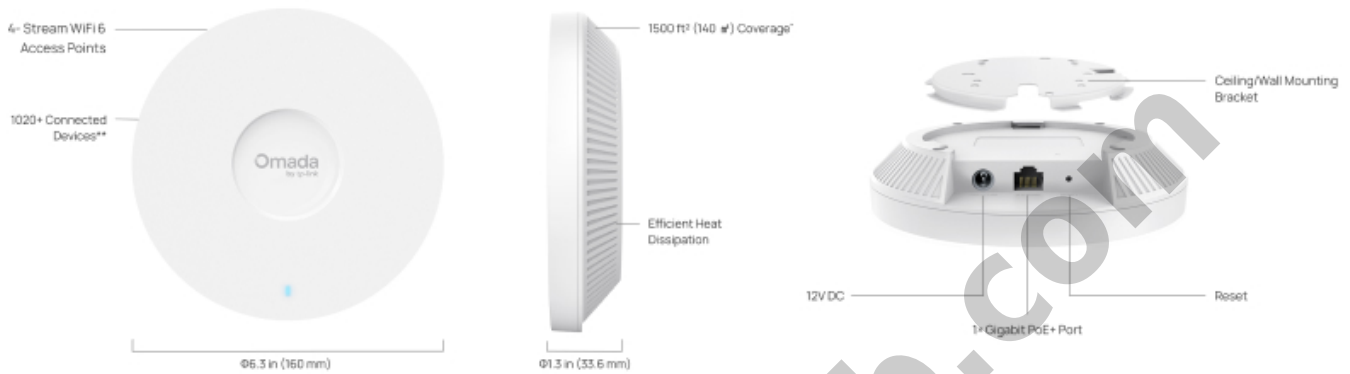

Spesifikasi

Model	EAP620 HD
HARDWARE FEATURES	
Interface	1x Gigabit Ethernet Port
Button	Reset
Power Supply	• 802.3at PoE • 48 V Passive PoE • 12 V/1.5 A DC
Max. Power Consumption	• EU: 14.4 W (For PoE); 13.1 W (For DC) • US: 14.9 W (For PoE); 13.4 W (For DC)
Dimensions (W x D x H)	6.3 x 6.3 x 1.3 in (160 x 160 x 33.6 mm)
Antenna	• 2.4 GHz: 2x 4 dBi • 5 GHz: 2x 5 dBi
Mounting	Ceiling /Wall Mounting/Junction Box Mounting (Kits included)
WIRELESS FEATURES	
Coverage	1500 ft² (140m²)
Concurrent Clients	1,020+
Wireless Standards	IEEE 802.11ax/ac/n/g/b/a
Frequency	5 GHz and 2.4 GHz
Signal Rate	574 Mbps (2.4 GHz) + 1201 Mbps (5 GHz)

Transmission Power	• CE: 7-20 dBm(2.4 GHz, EIRP) 7-23 dBm(5 GHz, U-NII-1 & U-NII-2A, EIRP) 7-30 dBm (5 GHz, U-NII-2C, EIRP) • FCC: 4-25 dBm (2.4 GHz) 4-25 dBm (5 GHz, U-NII-1, U-NII-3)
Wireless Functions	• 1024-QAM • 4x Longer OFDM Symbol • OFDMA • Multiple SSIDs (Up to 16 SSIDs, 8 for each band) • Enable/Disable Wireless Radio • Automatic Channel Assignment • Transmit Power Control (Adjust Transmit Power on dBm) • QoS(WMM) • MU-MIMO • Seamless Roaming(802.11k/v/r) • Omada Mesh • Band Steering • Load Balance • Airtime Fairness • Beamforming • Rate Limit • Reboot Schedule • Wireless Schedule • Wireless Statistics based on SSID/AP/Client
Wireless Security	• Captive Portal Authentication • Access Control • Wireless Mac Address Filtering • Wireless Isolation Between Clients • SSID to VLAN Mapping • Rogue AP Detection • 802.1X Support • WEP, WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise
Certification	CE, FCC
Package Content	• EAP620 HD • Power Adapter • Ceiling/Wall/Junction Box Mounting Kits • Installation Guide
Environment	• Operating Temperature: 0-40 deg (32-104 deg) • Storage Temperature: -40-70 deg (-40-158 deg) • Operating Humidity: 10-90% RH non-condensing • Storage Humidity: 5-90% RH non-condensing

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1584/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com