CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

TP-LINK EAP223 OMADA AC1350 Wireless MU-MIMO Gigabit Ceiling Mount Access Point



Kode : EAP223
Brand : TP-Link Omada
Jenis : Wireless Indoor
Harga : Rp 770.000,00

TP-LINK EAP223 OMADA merupakan perangkat access point **Dual-Band** dengan kecepatan up to 1317Mbps (450 Mbps pada 2.4GHz dan 867 Mbps pada 5GHz). Access point ini memiliki 1 port Gigabit Ethernet (support 802.3af dan 24 V passive Poe).

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

***Produk ini belum termasuk PoE Adapter.**
***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Penawaran Harga Spesial
08112039555

- **Wi-Fi Dual-Band Cepat** : Kecepatan simultan 450 Mbps pada 2,4 GHz dan 867 Mbps pada 5 GHz menghasilkan total kecepatan Wi-Fi 1317 Mbps.
- **Terintegrasi ke dalam Omada SDN** : Zero-Touch Provisioning (ZTP), Manajemen Cloud Terpusat, dan Pemantauan Cerdas.
- **Manajemen Terpusat** : Akses cloud dan aplikasi Omada untuk kenyamanan maksimal dan manajemen yang mudah.
- **Roaming Tanpa Gangguan** : Bahkan streaming video dan panggilan suara tidak terpengaruh saat pengguna berpindah antar lokasi.
- **Dukungan PoE** : Mendukung standar 802.3af dan PoE Pasif (adaptor PoE tidak termasuk) untuk instalasi yang fleksibel.
- **Jaringan Tamu Aman** : Dilengkapi dengan berbagai pilihan otentikasi (SMS/Sosial Media, Wi-Fi/Voucher, dll.) dan teknologi keamanan nirkabel yang melimpah.
- **Teknologi Nirkabel Tingkat Lanjut** : Optimalkan kinerja jaringan dengan teknologi MU-MIMO, Band Steering, Airtime Fairness, dan Beamforming.

www.citraweb.com

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

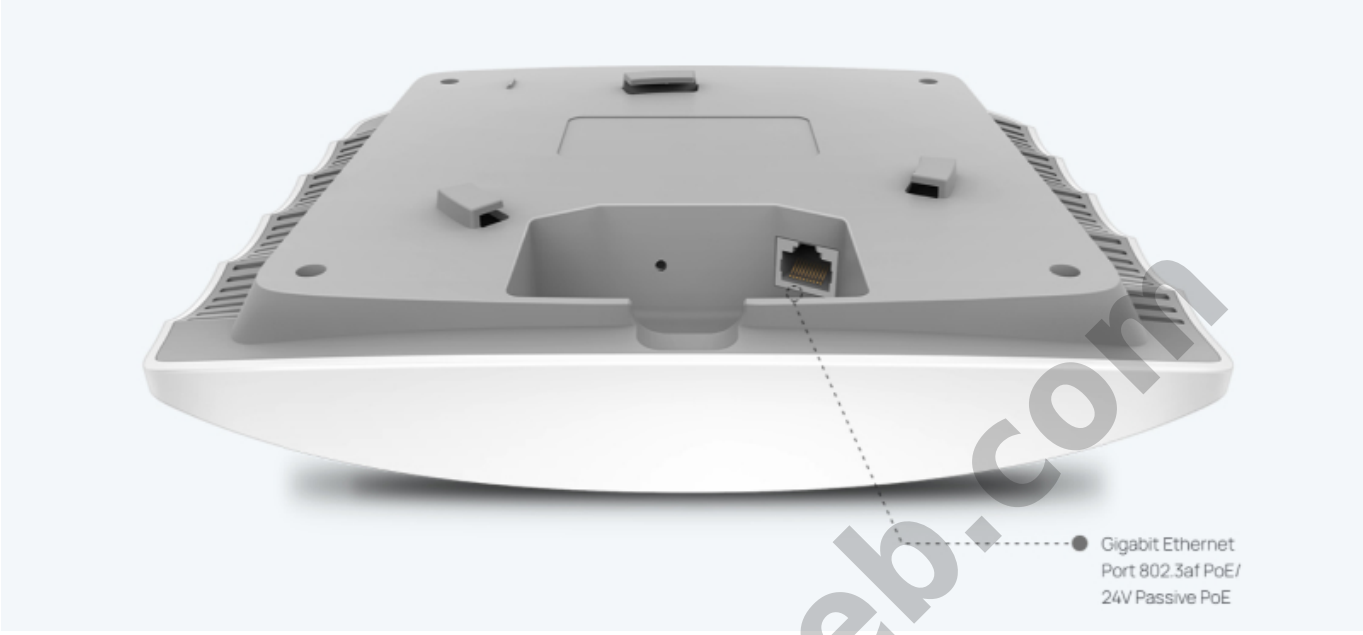

Spesifikasi

Model	EAP223
HARDWARE FEATURES	
Interface	Gigabit Ethernet (RJ-45) Port×1 (Support IEEE802.3af PoE and Passive PoE)
Button	Reset
Power Supply	• 802.3af PoE • 24V Passive PoE (+4,5pins; -7,8pins. PoE Adapter **IS NOT** Included)
Max. Power Consumption	12.6 W
Dimensions (W x D x H)	8.1 × 7.1 × 1.5 in (205.5 × 181.5 × 37.1 mm)
Antenna	3 Internal Omni • 2.4 GHz: 4 dBi • 5 GHz: 5 dBi
Mounting	Ceiling / Wall Mounting (Kits Included)
WIRELESS FEATURES	
Coverage	1250 ft² (115m²)
Concurrent Clients	220+
Wireless Standards	IEEE 802.11ac/n/g/b/a
Frequency	5 GHz and 2.4 GHz
Signal Rate	• 5 GHz:Up to 867 Mbps • 2.4 GHz:Up to 450 Mbps

www.citraweb.com

Transmission Power	• CE: ≤20 dBm(2.4 GHz, EIRP) ≤23 dBm(5 GHz, EIRP) • FCC: ≤24 dBm(2.4 GHz) ≤22 dBm(5 GHz)
Certification	CE, FCC
Package Content	• AC1350 Wireless MU-MIMO Gigabit Ceiling Mount Access Point EAP223 • Mounting Kits • Installation Guide
Environment	• Operating Temperature: 0 °C–40 °C (32 °F–104 °F) • Storage Temperature: -40 °C–70 °C (-40 °F–158 °F) • Operating Humidity: 10%–90% non-condensing • Storage Humidity: 5%–90% non-condensing

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1587/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com