CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

TP-LINK Beam Bridge 5 UR KIT OMADA 5GHz 867Mbps Ultra-Range Wireless Bridge



Kode : Beam Bridge 5 UR KIT
Brand : TP-Link Omada
Jenis : Wireless PTP
Harga : Rp 2.430.000,00


TP-LINK Beam Bridge 5 UR KIT OMADA menghadirkan Wi-Fi yang andal dengan latensi rendah dan integritas sinyal yang kuat, dilengkapi dengan antena directional gain tinggi 23 dBi untuk transmisi **Point to Point** tanpa gangguan jarak up to 15 KM dengan frekuensi 5Ghz.


Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial
08112039555

- **Transmisi Nirkabel Ultra-Jarak hingga 9,3 mil (15 km) Kelas Bisnis:** Dengan antena terarah gain tinggi 23dBi.
- **Plug-and-Play dengan Kit yang Sudah Dikonfigurasi** : Dikonfigurasi sebelumnya untuk pemasangan otomatis PtP instan, bridge ini memberikan konektivitas instan langsung dari kotak.
- **Penyelarasan Terpandu Aplikasi** : Penyelarasan terpandu aplikasi yang divisualisasikan untuk pengaturan jarak jauh dan pengujian kecepatan instan untuk verifikasi pemasangan.
- **Penyebaran PoE dan Catu Daya Sederhana:** 1 port Gigabit PoE mendukung PoE 802.3af dan PoE Pasif untuk penyederhanaan pengkabelan dan biaya penyebaran yang lebih rendah.
- **Dirancang untuk Ketahanan & Keandalan di Luar Ruangan:** Casing tahan cuaca IP65, perlindungan petir 6 kV, dan rentang suhu operasi -40 °C hingga +70 °C.
- **Pemantauan & Manajemen Jarak Jauh** : Mode mandiri atau mode Omada SDN untuk manajemen terpusat jarak jauh melalui UI Web atau Aplikasi.

www.citraweb.com

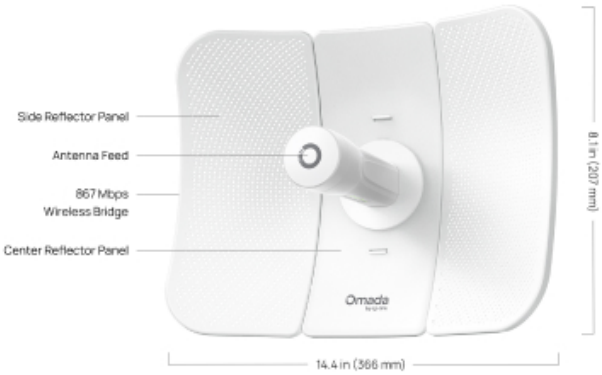

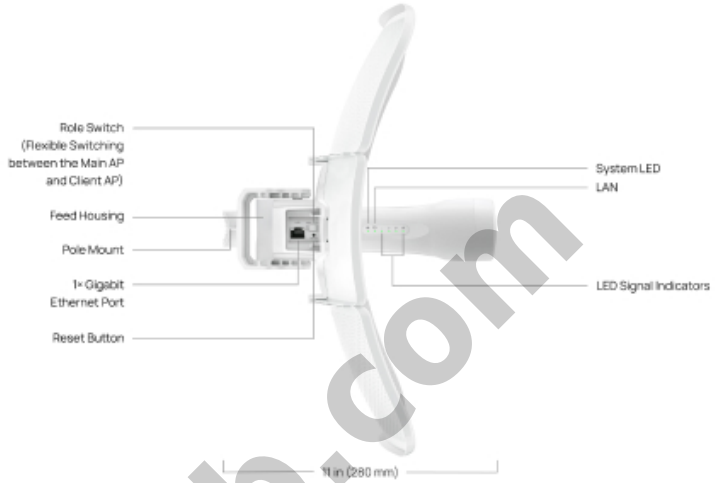



www.citraweb.com

Spesifikasi

Model	Beam Bridge 5 UR KIT
HARDWARE FEATURES	
Interface	1 x 10M/100M/1000Mbps Gigabit Ethernet Port (RJ45); PoE In
Button	1 × Reset Button 1 × System Mode Selection Button
DIP Switch	Role Switch

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

Power Supply	802.3af PoE (1,2pins; 3,6pins) 24V or 48V Passive PoE (+4,5pins; -7,8pins) (Passive PoE Adapter Included)
Max. Power Consumption	15.8W
Dimensions (W x D x H)	14.4 × 11.0 × 8.1 in (366 × 280 × 207 mm)
Antenna	External 2×2 Dual-Polarized Directional MIMO Antennas 5 GHz: 23 dBi
Antenna Beamwidth	Horizontal: 9°, Vertical: 7°
Weatherproof Enclosure	IP65
Bandwidth	5 GHz: 20 MHz/40 MHz/80 MHz
Mounting	Pole Mounting (Kits Included)
WIRELESS FEATURES	
Transmission Distance	15 km (9.3 mi)
Wireless Standards	IEEE 802.11 a/n/ac
Frequency	5 GHz
Signal Rate	5 GHz: Up to 867 Mbps
Wireless Functions	• MU-MIMO: 5G 2x2 MU-MIMO DL • Maximum number of associated STAs: 8 • Speed Test • Channel Optimization • Antenna Alignment • ACS (Automatic Channel Selection) • Rate Limit • Guest Network
Wireless Security	• VLAN • Rogue AP Detection • Maximum number of MAC Filter: 4,000 • Wireless Encryption
Transmission Power	• CE: <23 dBm (5 GHz, U-NII-1/2A, ERIP) <30 dBm (5 GHz, U-NII-1/2C, ERIP) • FCC: <27 dBm (5 GHz, U-NII-1) <27 dBm (5 GHz, U-NII-3)
Certification	CE, FCC
Package Content	• Beam Bridge 5 UR KIT • Installation Guide • Mounting Kit • Passive PoE Adapter • Power Cord

www.citraweb.com

Lightning Protection	Ethernet Ports: ±6 kV
Environment	• Operating Temperature: -40 °C - 70 °C (-40 °F - 158 °F); • Storage Temperature: -40 °C - 70 °C (-40 °F - 158 °F); • Operating Humidity: 10%–90% non-condensing; • Storage Humidity: 5%–90% non-condensing

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1593/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com