

TP-LINK ES205GP OMADA 5-Port Gigabit Easy Managed Switch with 4-Port PoE+

Kode : ES205GP

Brand : TP-Link Omada

Jenis : Switch Managed POE

Harga : Rp 623.000,00




TP-LINK ES205GP OMADA merupakan managed switch layer 2 dengan casing desktop/wallmount, 5 port Gigabit (4 port support 802.3af/at PoE+) dengan max PoE budget 65 W (up to 30 W per port).

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 08112039555

- 5 port RJ45 10/100/1000Mbps (4 port PoE+ yang sesuai dengan standar 802.3af/at)
- Konsumsi daya 65W, dengan daya hingga 30W untuk setiap port PoE
- Mudah Digunakan: Mendukung plug-and-play untuk konektivitas instan dan konfigurasi sederhana untuk fitur tambahan.
- Manajemen Cloud Terpusat melalui web atau aplikasi Omada
- Pencegahan Loop Otomatis, VLAN, dan IGMP Snooping
- Desain tanpa kipas untuk pengoperasian yang senyap
- Casing logam yang tahan lama dan desain pemasangan di meja/dinding

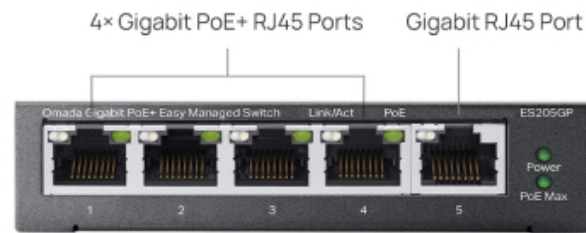

Power over Ethernet, Flexible Network Deployment

Transmit both data and power via a single cable to other 802.3af PoE or 802.3at PoE+ devices, without the hassle and cost of installing power cabling. Automatically detect and supply the required power to PoE-enabled devices.

4× Gigabit
PoE+
 RJ45 Ports

Up to
30W
 per Port

Total
65W
 PoE Budget

Compatible with
802.3af/at
 PoE and non-PoE devices




 Access Points


 IP Phones


 IP Cameras


 4K Video


 Computers

Spesifikasi

Model	ES205GP
HARDWARE FEATURES	
Interface	• 5× 10/100/1000Mbps RJ45 ports (4× 802.3af/at-compliant PoE+) • Auto-Negotiation/Auto MDI/MDIX
Fan	Fanless
Physical Security Lock	Yes
Power Supply	AC/DC Adapter (Input: 100-240V AC; Output: 53.5V DC/1.31A)
PoE Ports (RJ45)	• Standard: 802.3af PoE and 802.3at PoE+ compliant • PoE Ports: 4 ports • PoE Budget: 65 W available for all PoE+ ports, 30W max per port • Fast PoE & Perpetual PoE • PoE Auto Recovery
Dimensions (W x D x H)	3.9 × 3.9 × 1.0 in (100 × 98 × 25 mm)
Surge Protection	±6 kV
Mounting	• Desktop • Wall Mount

Max. Power Consumption	72.7 W (220 V/50 Hz @ 25 °C) (with 65 W PD connected) 65.2 W (110 V/60 Hz @ 25 °C) (with 65 W PD connected)
Max. Heat Dissipation	247.20 BTU/hr (220 V/50 Hz @ 25 °C) (with 65 W PD connected) 221.60 BTU/hr (110 V/60 Hz @ 25 °C) (with 65 W PD connected)
Packet Buffer Memory	4 Mbit
Switching Capacity	10 Gbps
Packet Forwarding Rate	7.4 Mpps
MAC Address Table	8K
Jumbo Frame	15 KB
Transmission Method	Store and Forward
SOFTWARE FEATURES	
Quality of Service	• Port-based/802.1p/DSCP QoS • 8 Priority Queues • Priority Schedule Mode - WRR (Weighted Round Robin) • Queue Weight Config • Bandwidth Control - Port-Based Rating Limit • Storm Control - Multiple Control Modes (kbps/pps) • Broadcast/Multicast/Unknown-Unicast Control
L2 Features	• Link Aggregation - Static Link Aggregation - Up to 2 aggregation groups and up to 4 ports per group • Loopback Detection • Flow Control - 802.3x Flow Control • Mirroring - Port Mirroring - One-to-One - Many-to-One - Ingress/Egress/Both • Port Statistics - Port Mirror Status - Traffic Statistics • 802.1ab LLDP
L2 Multicast	• IGMP Snooping - IGMP v1/v2/v3 Snooping - Fast Leave
VLAN	• 802.1Q Tag VLAN - Max 32 VLAN Groups - 4K VID

OTHERS	
Certification	CE, FCC
Package Content	• ES205GP • Power Adapter • Power Cord • Mounting Feet • Installation Guide
Environment	• Operating Temperature: -5-40C (23-104F) • Storage Temperature: -40-70C (-40-158F) • Operating Humidity: 10-90% RH non-condensing • Storage Humidity: 5-90% RH non-condensing

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1609/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com