

TP-LINK ES208G OMADA 8-Port Gigabit Easy Managed Switch

Kode : ES208G

Brand : TP-Link Omada

Jenis : Switch Managed

Harga : Rp 427.000,00





TP-LINK ES208G OMADA merupakan switch layer 2 dengan casing Desktop/Rackmount dilengkapi 8 port 10/10/1000 Mbps RJ45, casing metal dan fanless desain.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 **08112039555**

- 8 port RJ45 10/100/1000Mbps
- Mudah Digunakan: Mendukung plug-and-play untuk konektivitas instan dan konfigurasi sederhana untuk fitur tambahan
- Manajemen Cloud Terpusat melalui web atau aplikasi Omada
- Pencegahan Loop Otomatis, VLAN dan Pengawasan IGMP
- Desain tanpa kipas untuk pengoperasian yang senyap
- Casing logam yang tahan lama dan desain pemasangan di meja/rak

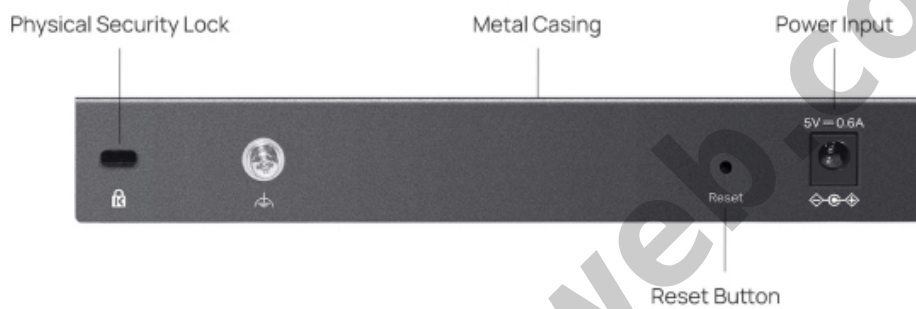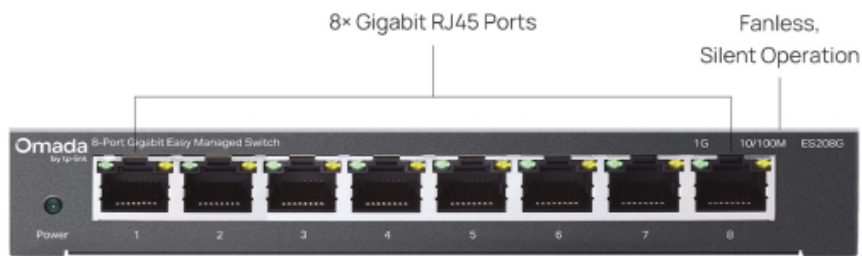


Spesifikasi

Model	ES208G
HARDWARE FEATURES	
Interface	• 8× 10/100/1000 Mbps RJ45 Ports • Auto-Negotiation/Auto MDI/MDIX
Fan	Fanless
Physical Security Lock	Yes
Power Supply	AC/DC Adapter (Input: 100-240V AC; Output: 5V DC/0.6A)
Dimensions (W x D x H)	6.2 × 4.0 × 1.0 in (158 × 101 × 25 mm)
Surge Protection	±6 kV
Mounting	• Desktop • Wall Mounting
Max. Power Consumption	2.679 W (220V/50Hz)
Max. Heat Dissipation	9.11 BTU/hr (220V/50Hz)
Packet Buffer Memory	4 Mbit
Switching Capacity	16 Gbps

Packet Forwarding Rate	11.9 Mpps
MAC Address Table	8K
Jumbo Frame	15 KB
SOFTWARE FEATURES	
Quality of Service	• Port-based/802.1p/DSCP QoS • 8 Priority Queues • Priority Schedule Mode - WRR (Weighted Round Robin) • Queue Weight Config • Bandwidth Control - Port-Based Rating Limit • Storm Control - Multiple Control Modes (kbps/pps) - Broadcast/Multicast/Unknown-Unicast Control
L2 Features	• Link Aggregation - Static Link Aggregation - Up to 2 aggregation groups and up to 4 ports per group • Loopback Detection • Flow Control - 802.3x Flow Control • Mirroring - Port Mirroring - One-to-One - Many-to-One - Ingress/Egress/Both • Port Statistics - Port Mirror Status - Traffic Statistics • 802.1ab LLDP • IEEE 802.3az EEE
L2 Multicast	• IGMP Snooping - IGMP v1/v2/v3 Snooping - Fast Leave
VLAN	• 802.1Q Tag VLAN - Max 32 VLAN Groups - 4K VID
Transmission Method	Store-And-Forward
OTHERS	
Certification	CE, FCC

Package Content	• ES208G • Power Adapter • Mounting Feet • Installation Guide
Environment	• Operating Temperature: -5-45C (23-113F) • Storage Temperature: -40-70C (-40-158F) • Operating Humidity: 10-90% RH non-condensing • Storage Humidity: 5-90% RH non-condensing

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1613/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com